



IMS Model 5012 LP Versi-Dredge®

OPERATING DIMENSIONS

Length	42 ft. 5 in. (12.9 m)
Width	11 ft. 3 in. (3.4 m)
Height	10 ft. (3.1 m) w/pre cleaner removed
Weight (less fuel)	28,000 lbs. (12,700 kg)

FLOTATION

Pontoons	Two (2) pontoons, 39 in. x 38 in. x 360 in. (990 mm x 960 mm x 9,150 mm); 10 ga. steel sides, bottom and 1/4" plate tops, internal bulkheads and stiffeners, and painted w/ a marine grade epoxy paint
Displacement	29,200 lbs. (13,200 kg)
Draft	30 in. (760 mm)

WORKING CAPACITY

Cut	108 in. (2,740 mm) wide x 22 in. (560 mm) deep
Working Depth	22 ft. (6.7 m); extensions available to 28 ft. (8.5 m)

ENGINE

Type	John Deere Diesel Model 6090AFM85; 6-cylinder 9.0 L, 375 HP (280 kW) @ 2,300 rpm
Fuel Capacity	300 gal. (1,135 liters)

HYDRAULIC SYSTEMS

Circuit #1	Slurry Pump 6.4 in ³ /rev. 60 gpm (3.78 liter/sec.) @ 5,500 psi
Circuit #2	Cutterhead, Boom, Winches and STARWHEELS® 7.9 in ³ /rev. load sense 75 gpm (4.73 liter/sec.) @ 2,500 psi
Reservoir	120 gal. (454 liters)
Filtration	1 tank mounted return filter with a 10-micron (min.) rating with an indicator and cab warning light. Slurry pump circuit remote charge filter 6-micron (min.) rating with an indicator and cab warning light. Filter with water removal capability are optional.

SOLIDSMaster CUTTERHEAD

Cutterbar Diameter	22 in. (560 mm)
Cutterbar Length	108 in. (2,740 mm)
Drive	Recessed dual hydraulic motor; direct drive with no gear reduction
Speed (variable)	0 to 60 rpm @ 2,500 psi
Torque	23,885 in.-lbs. (2,969 N-m) @ 2,500 psi (peak)
Cutterhead Tip Force	2,171 lbs. (9,657 N)
Cutterhead Teeth	Replaceable hardened steel excavator blades; available with paddlebar for materials that are easily slurried

DREDGE PUMP

Type	IMS
Discharge Diameter	12 in. (305 mm)
Suction Diameter	9.75 in. (248 mm)
Impeller Diameter	19.25 in. (489 mm)
Sphere Passage	6 in. (152 mm)
Pump Performance	3,500 gpm (220 liter/sec.) @ 65 ft. (19.8 m) TDH (water) @ 900 rpm. Available rubber lined for use in abrasives.
Speed (variable)	0 to 990 rpm

CONTROLS

Controls	Electronic joystick controls are provided in a climate controlled cab
----------	---

PROPULSION

Propulsion	STARWHEEL® Drive Self-Propulsion system; cable drive optional STARWHEELS® are individually operated for high maneuverability
Speed (variable)	0 to 15 rpm (STARWHEELS - on surface) 0 to 7 rpm (STARWHEELS) - underwater 0 to 55 fpm (cable drive)

ELECTRICAL SYSTEM

Voltage	24 volt, negative ground
Alternator Output	200 Amp

CORROSION PROTECTION

Standard Paint	Superstructure and hull are sandblasted and painted with two coats of marine epoxy suitable for saltwater service. A self-healing zinc clad undercoating is applied to above deck surfaces. The cab is made with galvaneal steel. Submerged surfaces are top-coated with two coats of anti-fouling paint. Average paint thickness is 12 mils minimum.
----------------	---

AVAILABLE ACCESSORIES

Accessories	Talk with a representative about options and custom features available.
-------------	---


HOURLY ESTIMATED OPERATING COSTS (\$USD)

Fuel @ \$2.50/gallon	\$39.75
Insurance	2.00
Labor (2 men @ \$16/hr.)	32.00
Maintenance (filters, seats, etc.)	1.20
Accrued Mechanical Overhaul	4.00
Pump & Cutterhead Wear	6.00
Hull Maintenance	3.60


Estimated Hourly Operating Cost \$88.55

Prices subject to local economics

IMS Model 5012 LP Versi-Dredge®

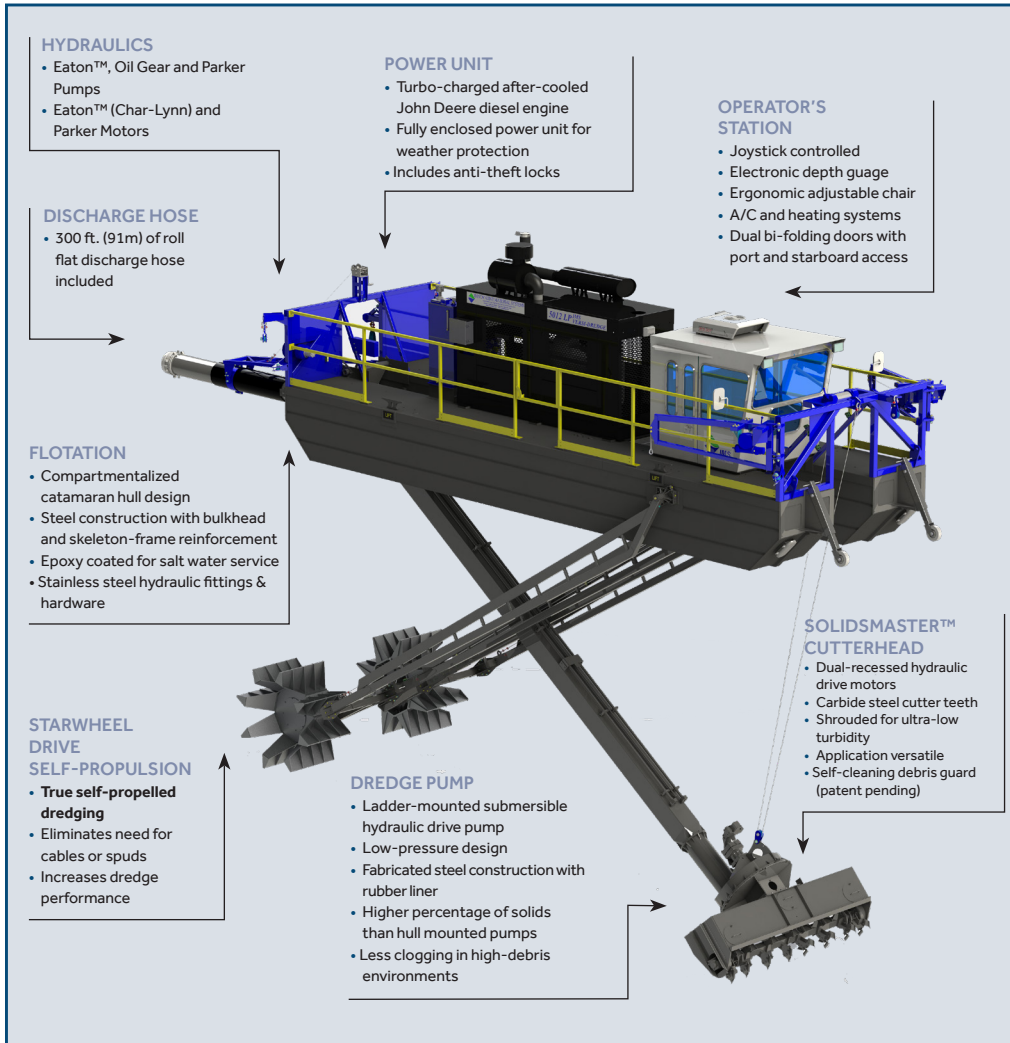

A Model 5012 LP removes silt from channels at a resort in the Middle East.

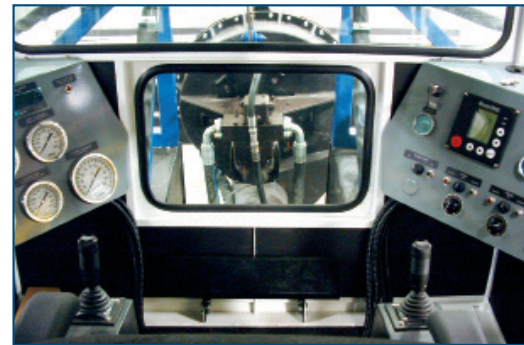

All Versi-Dredge® models come standard with joystick controls and oversized gauges for ease of operation.

STANDARD EQUIPMENT

- 300 ft. (91 m) of roll flat discharge hose
- 12 saddle type hose floats
- Fully enclosed engine compartment
- Rock guard
- Windlass system for cable drive
- Climate-controlled operator cabin
- Pump/cutterhead view window
- Cathodic protection
- Joystick controls
- Ergonomic adjustable chair
- Digital depth gauge
- Horn
- 360 degree lighting
- Two (2) swivel cranes (800 lb. capacity, 363 Kg)
- U.S. hand tool kit and tool box
- Sound system
- 360 Degree spotlight with toggle switch in cab
- Closed loop video monitor for discharge

OPTIONAL EQUIPMENT

- WeedMaster® Cutterhead
- Weed Rake
- Broadcaster Discharge Attachment
- GPS System (w/sub-meter accuracy)
- Slurry thickness tattle tail
- Pipe, hose, saddle floats
- Navigation lights

FEATURES	BENEFITS
Superior Pump Design	12 in. (305mm) Hardox steel pump with rubber liner for abrasive service. Ladder mounted for higher solids than the competition. Proven worldwide for low downtime and easy maintenance.
High Solids Pump	Standard pump passes 6 inch (152mm) spherical solids.
Self-Propelled	Includes Patented Starwheel Drive self-propulsion system that allows for maximum maneuverability in lakes, canals, and rivers where setting anchors is not ideal. Patent pending Traction Master technology allows for higher speed paddling on surface that automatically switches to high torque mode when operating on the bottom of the water body for maximum traction control.
Powerful Cutterhead	23,885 in.-lbs. torque with replaceable hard faced carbide steel trencher teeth.
Fully Enclosed Power Unit	Power unit has locking security doors and full shroud to protect from the elements and potential vandalism.
One Truck Transportable	Ships fully assembled and requires no installation of side tanks, spuds, or separate dredge ladder.
Dredging Depth	22 ft. (6.7m) standard dredging depth allows for greater project versatility. Deepest in its class.
Modern Operator's Cab	Spacious, climate controlled operators cabin with electronic over hydraulic joystick controls, rear back up camera w/ color monitor, 360 degree spot light, digital depth gauge, CANbus system for easy trouble shooting with factory, oversized analog back-lit gauges, sound system, fan, horn, windshield wipers, and dual folding doors for easy access to port and starboard decks.
Pump Defender (Patented)	Standard patented Pump Defender allows for cleaning of the pump inlet after every revolution of the cutterhead to greatly reduce down time in debris rich environments by up to 80%.
Vegetation Cutterhead (Patented)	Optional patented WeedMaster cutterhead converts the 5012 LP into a hydraulic weed harvesting system that will cut hyacinths, reeds, and other types of vegetation into small pieces and pump them up to 3,280 ft. (1km) away (requires open impeller option).
Clean Dredge Deck	No obstructions on deck and clear pathways from front to back and port and starboard decks. All components are designed for easy access and maintenance.
Complimentary Flexible Discharge Package	Includes 300 ft. (91m) of heavy duty flexible, roll-flat discharge hose and floats to give the dredge maximum maneuverability when connected to the hard discharge line.
Service and Support	12 month warranty with lifetime phone and e-mail support. Warranty site visits anywhere in the world if problem cannot be solved via phone. Largest field service staff in the transportable dredge industry backed by a dedicated Customer Project Coordinator for rapid communication.



Ph: 913-642-5100 or 866-467-4010 (USA Only)
Fax: 913-642-5119

E-mail: versidredge@imsdredge.com

IMS, A Division of EDT

1750 Madison Avenue
New Richmond, Wisconsin U.S.A. 54017
Website: www.imsdredge.com